

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
12 December 2002 (12.12.2002)

PCT

(10) International Publication Number
WO 02/099836 A1

(51) International Patent Classification⁷: **H01J 33/00**,
A61L 2/14, H01J 37/32

(74) Agent: **MORGAN, LEWIS & BOCKIUS LLP**; Mary-Jane Boswell et al., 1111 Pennsylvania Avenue, N.W., Washington, DC 20004 (US).

(21) International Application Number: **PCT/US02/18146**

(22) International Filing Date: **7 June 2002 (07.06.2002)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:
09/875,041 **7 June 2001 (07.06.2001) US**

(71) Applicant (for all designated States except US): **PLAS-MION CORPORATION** [US/US]; 50 Harrison Street, Hoboken, NJ 07030 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **YU, Dong, Woo** [US/US]; 2 Blanche Avenue, Demarest, NJ 07627 (US). **KIM, Steven** [US/US]; 228 Blanch Avenue, Harrington Park, NJ 07640 (US).


(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

[Continued on next page]

(54) Title: **APPARATUS AND METHOD USING CAPILLARY DISCHARGE PLASMA SHOWER FOR STERILIZING AND DISINFECTING ARTICLES**

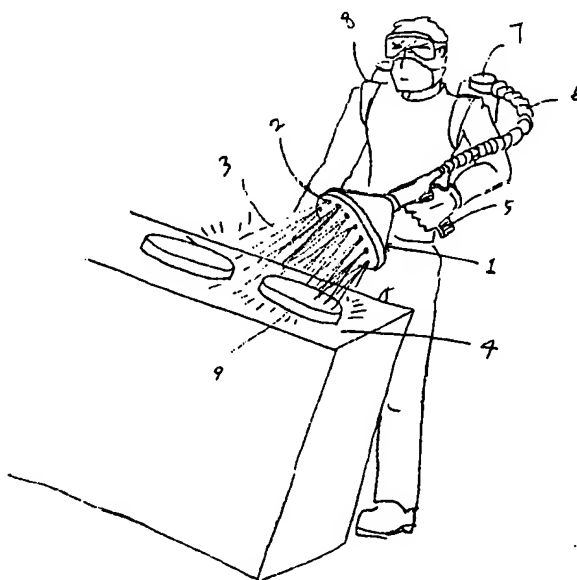

(57) Abstract: An apparatus for sterilizing an article using capillary discharge atmospheric pressure plasma is disclosed. The apparatus includes a power supplier providing a potential to the apparatus, a plasma generating head, a gas supplier providing a sufficient amount of working gas to the plasma generating head, and a body including a handle and coupled to the plasma generating head and the gas supplier. The plasma generating head includes, a metal electrode receiving the potential, a dielectric having at least one capillary therein coupled to the metal electrode, and a shield body surrounding at least a portion of the metal electrode except for the capillary.

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

APPARATUS AND METHOD USING CAPILLARY DISCHARGE PLASMA SHOWER
FOR STERILIZING AND DISINFECTING ARTICLES

BACKGROUND OF THE INVENTION

5

Field of the Invention

The present invention relates to an apparatus and method for disinfecting and sterilizing articles, and in particular the present invention relates to a method and system using a capillary discharge plasma shower for disinfecting and sterilizing articles.

Discussion of the Related Art

A number of sterilizing and disinfecting systems and methods have been developed to treat articles. Amongst them are steam sterilization, chemical sterilization, thermal inactivation, irradiation, etc.

In steam sterilization for example, the article is placed in an apparatus similar to an autoclave. In a typical steam sterilization process, the item is exposed to steam at approximately 250°F, for about 30 minutes.

Steam sterilization has been disadvantageous for sterilization for it requires relatively large and costly equipment. Furthermore, steam sterilization equipment is expensive to operate due in large part to the substantial heating requirements. Steam sterilization is also

disadvantageous in that it generally does not eliminate highly objectionable visual evidence of the contamination.

Chemical sterilization usually makes use of soaps and detergents. However, the use of chemicals, especially in
5 large quantities also has its drawbacks. Many of the chemicals used in the sterilization process are not biodegradable. Therefore, although chemical sterilization might be good disinfecting articles, their harm to the environment outweighs their benefits.

10 Thermal inactivation is accomplished by the application of dry heat in an oven, which is usually operated by electricity. This process involves heating the article with an electric source, and then maintaining a temperature of around 200°F for approximately two hours in a large enclosed
15 chamber. This process also tends to be expensive.

Irradiation exposes wastes to ultraviolet or ionizing radiation from a source such as cobalt 60 in an enclosed, shielded chamber. Disadvantages are the large initial cost of the equipment, and the skilled personnel required for safe
20 operation just to name a few. Furthermore, this method is only effective if the ultraviolet radiation reaches the contaminant and generally little radiation penetrates the item, which tends not to be ultraviolet transparent.

SUMMARY OF THE INVENTION

Accordingly, the present invention is directed to a method and an apparatus for plasma treatment using capillary discharge plasma shower that substantially obviate one or more
5 of the problems due to limitations and disadvantages of the related art.

A feature of the present invention is to provide a method and system that is used in hospitals, medical centers, and treatment centers for both human and animals, to sterilize
10 instruments used in surgical and medical procedures.

Another feature of the present invention is to provide a system and method that is used in the sterilization of air in medical areas where sterilization is fundamental in the prevention of the spread of disease by bacteria, germs,
15 viruses and fungi.

A further feature of the present invention is to provide a system and method used for sterilization of medical equipment utilized in surgery, and medical devices that are employed in areas where sterilization is necessary, such as
20 diagnostic equipment used in medicine.

Furthermore, the present invention provides a system and method for the sterilization of clothing (fabric, paper and disposable) masks, eyeglasses and eyewear, gloves, shoes, and the like. The present invention is also utilized in the

sterilization of sheets, bed clothing, blankets and towels
used in hospitals, medical centers and treatment centers.

The present invention can also be utilized in the
sterilization of materials used in hospitals, medical centers
5 and treatments centers, such as wound dressings, gauze,
bandages, cotton swabs, suture materials and the like.

A further feature of the invention is to provide a method
and system used for the sterilization of humans and animals,
such as for wounds, cuts, or any type of infection caused by
10 bacteria, virus or fungi. For example, a person suffering
from athlete's foot can utilize the system and method of the
present invention for treating the affected area.

Additional features and advantages of the invention will
be set forth in part in the description that follows, and in
15 part will be obvious from the description, or may be learned
by practice of the invention. The features and advantages of
the invention will be realized and attained by means of the
elements and combinations particularly pointed out in the
appended claims.

20 To achieve these and other advantages and in accordance
with the purpose of the invention, as embodied and broadly
described, the present invention provides a portable apparatus
for sterilizing an article using a capillary discharge
atmospheric pressure plasma, including a power supplier
25 providing a potential to the apparatus, a plasma generating

head generating the capillary discharge atmospheric plasma,
wherein the plasma generating head includes, a metal electrode
receiving the potential, a dielectric having at least one
capillary therein coupled to the metal electrode, and a shield
5 body surrounding at least a portion of the metal electrode
except for the capillary; a gas supplier providing a
sufficient amount of working gas to the plasma generating
head; and a body including a handle and coupled to the plasma
generating head and the gas supplier.

10 The present invention further provides a sterilizing
chamber using a capillary discharge atmospheric pressure
plasma for sterilizing articles comprising an enclosed chamber
enclosing the articles, at least one plasma generating head
placed in the chamber, wherein the plasma generating head
15 generating the capillary discharge atmospheric pressure plasma
includes a metal electrode receiving the potential, a
dielectric having at least one capillary therein coupled to
the metal electrode, and a shield body surrounding at least a
portion of the metal electrode except for the capillary, and a
20 gas supplier providing a sufficient amount of working gas to
the plasma generating head.

Furthermore, the present invention provides a method for
sterilizing articles using a capillary discharge atmospheric
pressure plasma generating apparatus, the method comprising
25 the steps of placing the apparatus in close proximity to the

articles, wherein the apparatus comprises a power supplier providing a potential to the apparatus, a plasma generating head generating the capillary discharge atmospheric pressure plasma, wherein the plasma generating head comprises a metal electrode receiving the potential, a dielectric having at least one capillary therein coupled to the metal electrode, and a shield body surrounding at least a portion of the metal electrode except for the capillary, a gas supplier providing a sufficient amount of working gas to the plasma generating head, and a body including a handle and coupled to the plasma generating head and the gas supplier, applying the potential to the metal electrode, generating the capillary discharge atmospheric pressure plasma from the capillary to sterilize the articles, and relocating the plasma generating head with respect to the articles if necessary.

Additionally, the present invention provides a method for sterilizing an article using a capillary discharge atmospheric pressure plasma generating chamber, the method comprising the steps of placing the articles in the chamber, wherein the chamber comprises an enclosed chamber enclosing the article, a power supplier providing a potential to the chamber, at least one plasma generating head generating the capillary discharge atmospheric plasma, wherein the plasma generating head comprises a metal electrode receiving the potential, a dielectric having at least one capillary therein except for

the capillary, a gas supplier providing a sufficient amount of working gas to the plasma generating head, and a body including a handle and coupled to the plasma generating head and the gas supplier, applying the potential to the metal electrode, generating the capillary discharge atmospheric pressure plasma from the capillary to sterilize the article, and relocating the article with respect to the plasma generating head if necessary.

It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are included to provide further understanding of the invention and are incorporated in and constitute part of this specification, illustrate embodiments of the invention, and together with the description serve to explain the principles of the invention.

In the drawings:

Fig. 1 shows an individual using a portable capillary discharge plasma device disinfecting several articles of the present invention.

Fig. 2 shows an individual in a disinfecting chamber of the present invention.

Fig. 3 shows a capillary discharge plasma head of the present invention.

Fig. 4 shows a cross-sectional view of a capillary discharge plasma head of a first embodiment in the present invention.

Fig. 5 shows a cross-sectional view of a capillary discharge plasma head of a second embodiment in the present invention.

Fig. 6 shows a cross-sectional view of a capillary discharge plasma head of a third embodiment in the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings. Wherever possible, the same reference numbers will be used throughout the drawing to refer to the same or like parts. The present invention provides an apparatus and method for sterilizing a plurality of articles with the use of a capillary plasma discharge. The plasma discharge apparatus may be designed in the form of a hand held or stationary device wherein the plasma discharged from a capillary is focused on the article. The plasma discharge can destroy bacteria, germs, viruses and fungi. The use of the plasma discharge is not limited to articles, but

can also be used on living creatures such as humans and animals. For example, the plasma discharge could be directed onto a person's foot to destroy athlete's foot, caused by fungi. The plasma discharge also finds use in a variety of locations, such as hospitals, medical centers, and treatment centers, for both humans and animals. Furthermore, the present invention could be used to sterilize instruments used in surgical and medical procedures.

Fig. 1 shows a portable capillary plasma discharge device operated by an individual. The device can be mounted on the individual's back similarly to a backpack (8). The individual must wear protective gear such as a special suit, footwear and a mask to avoid a possible infection from the contaminated article while operating the machine.

Fig. 1 also illustrates several articles (9) being sterilized. The articles can be placed on a special table top or counter top (4) where the sterilization is to take place. The sterilization device (1) comprises a plasma head (2), a handle (5), a tube (6) and a gas tank (7). The individual holds the device by the handle (5) and aims at the article to be sterilized. After depressing a trigger (not shown), plasma (3) is discharged from the device sterilizing the article.

Fig. 2 illustrates a sterilization chamber (20). The sterilization chamber generally comprises a plurality of plasma discharge showerheads (21) arranged on the walls and on

the floor of the chamber. An individual wearing clothes that need to be disinfected or sterilized such as prior to an operation or immediately thereafter, enters the chamber. For example, the individual would be wearing a mask (26), head cap (25), suit (22), footwear (23), and gloves (24). Once the individual enters the chamber, the plasma showerheads are activated and the sterilization process of the clothing begins. All of the clothes and footwear of the individual are exposed to the plasma shower, and the articles become disinfected. After a defined amount of time, the showerheads are turned off and the garments worn by the individual are sterilized.

Fig. 3 illustrates a plasma showerhead. The plasma showerhead comprises a plurality of openings through which the plasma exits the device.

FIG. 4 is a schematic cross-sectional view illustrating an apparatus for plasma treatment using a capillary plasma shower according to a first embodiment of the present invention. As shown in FIG. 4, an apparatus for plasma treatment using a capillary plasma shower according to a first embodiment includes a first metal electrode (41), a capillary dielectric (42), a shield body (43), a gas supplier (44), a power supply (45) and a gas tube (47).

The first metal electrode (41) is coupled to the power supply (45). Either a DC or a RF potential may be applied to

the first metal electrode (41). In the case where the RF potential is applied, it is preferably in the range of 10 kHz to 200 MHz.

The capillary dielectric (42) has first and second sides and coupled to the first metal electrode (41) through the first side of the capillary dielectric (42). The capillary dielectric (42) has at least one capillary. For example, the number of capillaries may range from one to thousands. A thickness of the capillary dielectric (42) may be in the range of 2 mm to 300 mm. A diameter of each capillary is preferably in the range of 200 μ m to 30 mm.

The first metal electrode (41) can be in the form of a metal cylinder or a parallelepiped having one or more holes in the bottom surface that are substantially aligned with capillaries in the capillary dielectric (42). One side of the capillary dielectric (42) is coupled to the first metal electrode (41) inside the shield body (43) while another side of the capillary dielectric (42) is outside the shield body (43) and exposed to a article.

The shield body (43) surrounds the first metal electrode (41) and the capillary dielectric (42), so that it prevents unnecessary area from generating discharge. The shield body (43) is made of a dielectric material. A grip may be formed on the shield body (43) so that a user can conveniently hold it. The gas supplied with the metal electrode (41) passes

through the capillary. Since a high electric field is maintained across the capillary dielectric (42), a high-density discharge beam is generated in the capillary. The gas may be a carrier gas or a reactive gas depending upon a specific application of the apparatus. An additional gas supplier (48) may be supplied to a space between the capillary dielectric (42) and an article to be treated by plasma discharge.

The article to be treated by the apparatus for plasma treatment using the capillary plasma shower discharge may act as a counter electrode.

The gas tube (47) made of a metal or a dielectric material is further coupled to a metal electrode (41), so that gas is supplied by the gas supplier (44) through the gas tube (47). The gas can be any gas, preferably, it can be Ar, He, O₂ or air, or any mixture of these gases.

A second metal electrode (49) can be mounted on the second side of the capillary dielectric (42). Preferably, the second metal electrode (49) is completely encapsulated in the capillary dielectric to prevent arcing between the electrodes. This second metal electrode (49) can be used to provide additional focusing of the plasma discharge (46).

The second metal electrode (49) is connected to the power supply (45) in series with the first metal electrode (41). This provides a potential difference with respect to

the first metal electrode (41). It is unnecessary to connect the article (not shown) to ground and articles made of virtually any kind of material, such as metal, ceramic, and plastic, can be treated by the apparatus of the present invention.

FIG. 5 is a schematic cross-sectional view illustrating an apparatus for plasma treatment using a capillary plasma shower according to a second embodiment of the present invention. As shown in FIG. 5, an apparatus for plasma treatment using a capillary plasma shower according to a second embodiment comprises a power supply (50), pin electrodes (51), capillaries (52), dielectric body (56), and chamber (56a). Additionally, the apparatus comprises a counter electrode (55) electrically coupled to the pin electrodes, a gas supplier (59), and a gas tube (58).

One of the terminals of the power supply (50) is coupled to pin electrodes (51), while the other terminal is coupled to the counter electrode (55) and is grounded. Either a DC or a RF potential may be applied to the pin electrode (51). In the case where the RF potential is applied, it is preferably in the range of 10 kHz to 200 MHz.

The dielectric body (56) has first and second sides, the first side coupled to the pin electrodes (51), and the second side having at least one capillary that extends into a portion of the dielectric body (56). The pin electrodes (51) and the

capillaries (52) are substantially aligned and generally have a one to one correspondence. Although there are no critical limitation in a thickness of the dielectric body (56), the thickness of the dielectric body (56) may be in the range of 1 mm to 3 cm. A diameter of each capillary is preferably in the range of 0.2 mm to 0.8 mm. A non-conductive substrate (54) is placed between pin electrodes (51) and counter electrode (55), and subjected to a plasma treatment using capillary discharge plasma.

10 The pin electrodes (51), and a portion of the capillaries, are enclosed in the chamber (56a). Chamber (56a) additionally comprises a gas tube (58), and a gas supplier (59). The gas tube (58) is made of a metal or a dielectric material and is connected to gas supplier (59). The gas
15 supplied to chamber (56a) can be any gas, preferably it can be Ar, He, O₂ or air, or any mixture of these gases.

Fig. 6 illustrates a cross-sectional view of a plasma showerhead of a third embodiment. Similarly to the previous embodiment, the apparatus includes at least one pin electrode
20 (61) for receiving a power source (60). A dielectric body (67) having first and second sides, wherein the first side is coupled to the pin electrode (61) and the second side has at least one capillary (62) extending to a direction of the first side of the dielectric body. Each capillary is substantially
25 aligned with each pin electrode, and a counter electrode

electrically coupled to the pin electrode for generating the plasma from each capillary. The apparatus further includes a gas supplier (69) and a gas tube (68) extending into a chamber (66a) housing pin electrodes (61).

5 In order to demonstrate a feasibility of practical applications in industries, experiments were conducted using an apparatus and method as previously discussed in the present invention. As recommended in the procedure of the AOAC (Official Method Analysis of the Association of Official
10 Analytical Chemists, 12th Ed. Nov. 1975), *Bacillus subtilis* and *Bacillus stearothermophilus* were used in the experiments. Control spore strips (American Sterilizer Co. SPORIDI®) made of *Bacillus subtilis* and *Bacillus stearothermophilus* were tested under different conditions: ETOC (ethylene oxide
15 certified) method, DHC (dry heat certified) method, and CDAP (capillary discharge atmospheric plasma) method.

 First, the number of survivor for *Bacillus subtilis* after treated by the CDAP method was measured from 0 second to 120 seconds. Before the CDAP treatment, the number of
20 survivor of *Bacillus subtilis* was about 950,000. The numbers were significantly reduced to about 600,000 in 60 seconds and about 200,000 in 120 seconds after the CDAP treatment.

 D-value was also measured for the ETOC, DHC, and CDAP methods. D-value is described as the time necessary to reduce
25 the population of cells by one log or 90%. These values are

determined from the plots of the number of survivors vs. time.

Thus, based on the data, D-value is calculated for each method. For the ETOC and DHC methods, D-values were about 3.9 minutes and 1.5 minutes, respectively. D-value for the CDP
5 method of the present invention was 2.95 minutes. The D-value of the present invention was higher than that of the DHC method. However, the DHC method has some disadvantages in application. For example, the DHC method cannot directly be applied to a living human body or any animal because of hot
10 and dry conditions.

On the other hand, the CDAP treatment has almost no restriction in applying because it's non-thermal nature of plasma.

Similar data were obtained from *Bacillus*
15 *stearothermophilus* in the number of survivor and D-value. Before the CDP treatment, the number of survivor for *Bacillus subtilis* was about 4,200,000. The numbers were also significantly reduced to about 1,000,000 in 60 seconds and about 240,000 in 120 seconds after the CDAP treatment. For
20 *Bacillus stearothermophilus*, D-value obtained for the sample treated by the CDAP method was lower than that by the DHC method. D-values for the CDAP and DHC method were about 1.54 and 1.90 minutes, respectively.

Accordingly, the experimental results indicate that the CDAP method of the present invention is very effective in sterilizing *Bacillus stearothermophilus*.

While the invention has been described in detail and
5 with reference to specific embodiments thereof, it will be
apparent to one skilled in the art that various changes and
modifications can be made therein without departing from the
spirit or scope thereof. Thus, it is intended that the
present invention covers the modifications and variations of
10 this invention provided they come within the scope of the
appended claims and their equivalents.

What is claimed is:

1. A portable apparatus for sterilizing an article using a capillary discharge atmospheric pressure plasma, comprising:

a power supplier providing a potential to the apparatus;

a plasma generating head generating the capillary discharge atmospheric plasma, wherein the plasma generating head includes,

a metal electrode receiving the potential,

a dielectric having at least one capillary therein coupled to the metal electrode, and

a shield body surrounding at least a portion of the metal electrode except for the capillary;

a gas supplier providing a sufficient amount of working gas to the plasma generating head; and

a body including a handle and coupled to the plasma generating head and the gas supplier.

2. The apparatus according to claim 1, wherein the dielectric has a thickness in the range of 2 mm to 300 mm.

3. The apparatus according to claim 1, wherein the at least one capillary has a diameter in the range of 200 μm to 30 mm.

4. The apparatus according to claim 1, wherein the potential provided to the apparatus is a DC or a RF potential.

5. The apparatus according to claim 4, wherein the RF potential is in the range of 10 KHz to 200 MHz.

6. A sterilizing chamber using a capillary discharge atmospheric pressure plasma for sterilizing articles, comprising:

an enclosed chamber enclosing the articles;

a power supplier providing a potential to the chamber;

at least one plasma generating head placed in the chamber, wherein the plasma generating head generating the capillary discharge atmospheric pressure plasma includes:

a metal electrode receiving the potential,

a dielectric having at least one capillary therein coupled to the metal electrode, and

a shield body surrounding at least a portion of the metal electrode except for the capillary; and

a gas supplier providing a sufficient amount of working gas to the plasma generating head.

7. The plasma generating head of claim 6, wherein the dielectric has a thickness in the range of 2 mm to 300 mm.

8. The plasma generating head of claim 6, wherein the at least one capillary has a diameter in the range of 200 μ m to 30 mm.

9. The plasma generating head according to claim 6, wherein the potential provided to the chamber is a DC or a RF potential.

10. The plasma generating head according to claim 9, wherein the RF potential is in the range of 10 kHz to 200 MHz.

11. A method for sterilizing articles using a capillary discharge atmospheric pressure plasma generating apparatus, the method comprising the steps of:

placing the apparatus in close proximity to the articles, wherein the apparatus comprises a power supplier providing a potential to the apparatus, a plasma generating head generating the capillary discharge atmospheric pressure plasma, wherein the plasma generating head comprises a metal

electrode receiving the potential, a dielectric having at least one capillary therein coupled to the metal electrode, and a shield body surrounding at least a portion of the metal electrode except for the capillary, a gas supplier providing a sufficient amount of working gas to the plasma generating head, and a body including a handle and coupled to the plasma generating head and the gas supplier;

applying the potential to the metal electrode;

generating the capillary discharge atmospheric pressure plasma from the capillary to sterilize the articles; and

relocating the plasma generating head with respect to the articles if necessary.

12. The method according to claim 11, wherein the articles include space in medical areas, skin of humans and animals, containers and glassware for holding medicine, vaccines, injectables, pills, and any medical products for liquids, powders, and solids, and bulk chemicals, and containment of medicines in processing and after packaging.

13. A method for sterilizing an article using a capillary discharge atmospheric pressure plasma generating chamber, the method comprising the steps of:

placing the articles in the chamber, wherein the chamber comprises an enclosed chamber enclosing the article, a power supplier providing a potential to the chamber, at least one plasma generating head generating the capillary discharge atmospheric plasma, the plasma generating head comprising a metal electrode receiving the potential, a dielectric having at least one capillary therein except for the capillary, a gas supplier providing a sufficient amount of working gas to the plasma generating head, and a body including a handle and coupled to the plasma generating head and the gas supplier; applying the potential to the metal electrode; generating the capillary discharge atmospheric pressure plasma from the capillary to sterilize the article; and relocating the article with respect to the plasma generating head if necessary.

14. The method according to claim 13, wherein the articles include space in medical areas, skin of humans and animals, containers and glassware for holding medicine, vaccines, injectables, pills, and any medical products for liquids, powders, and solids, and bulk chemicals, and containment of medicines in processing and after packaging.

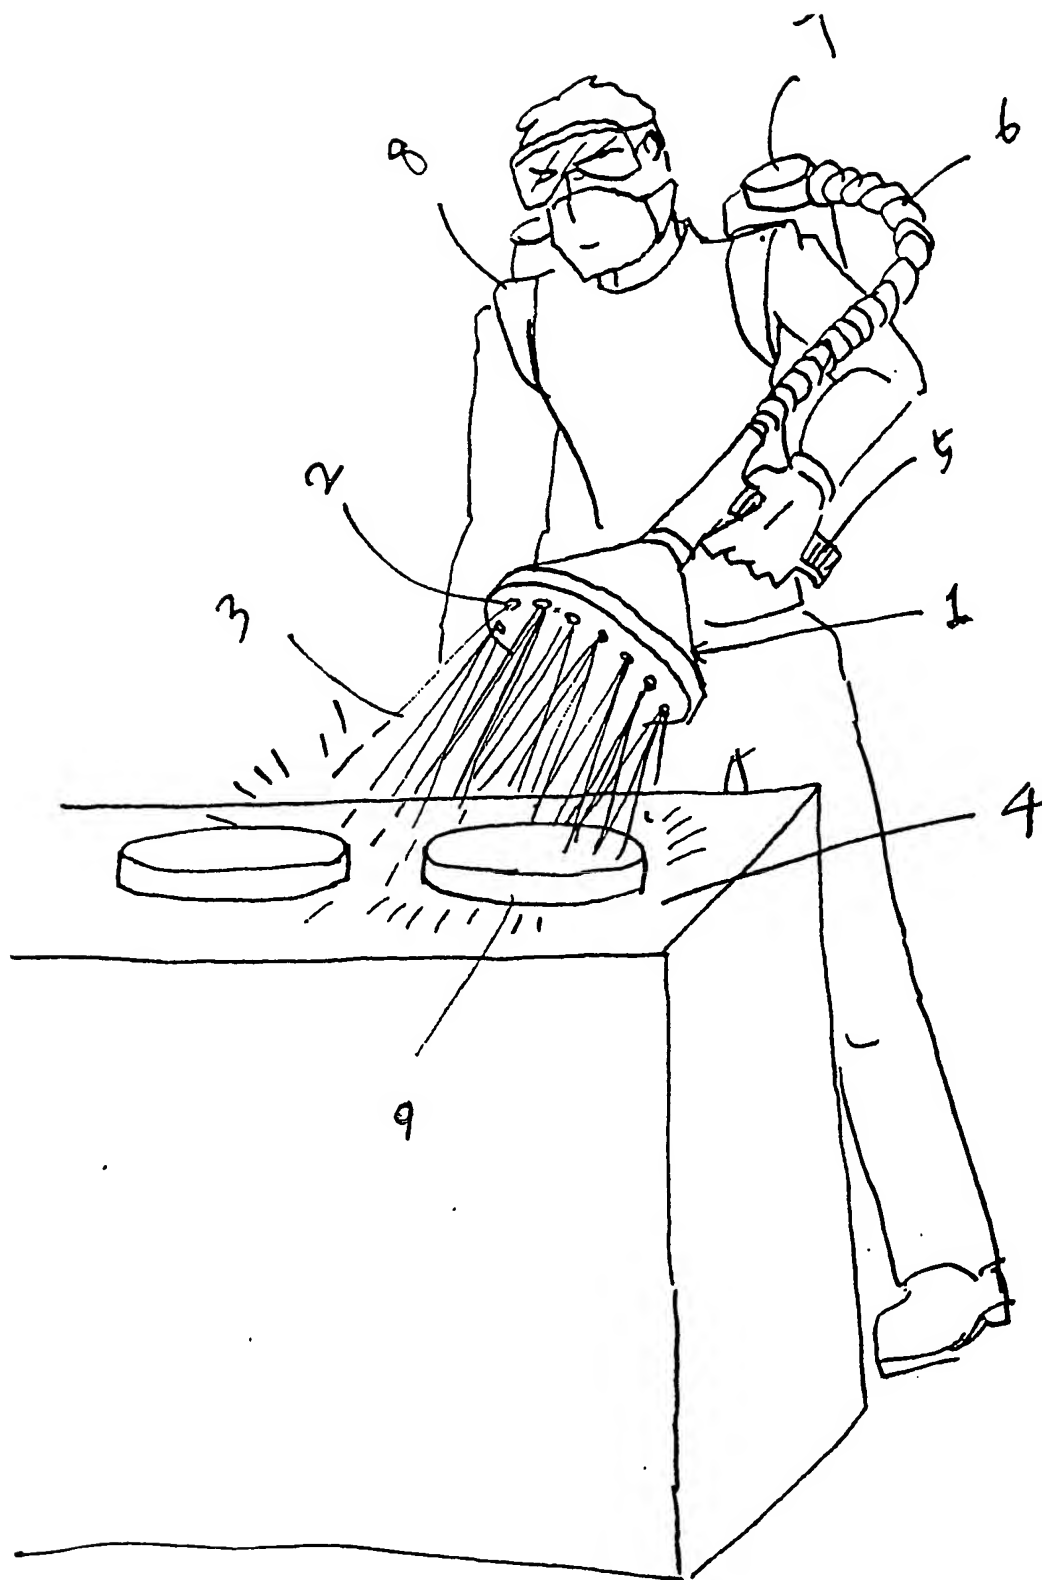


Fig. 1

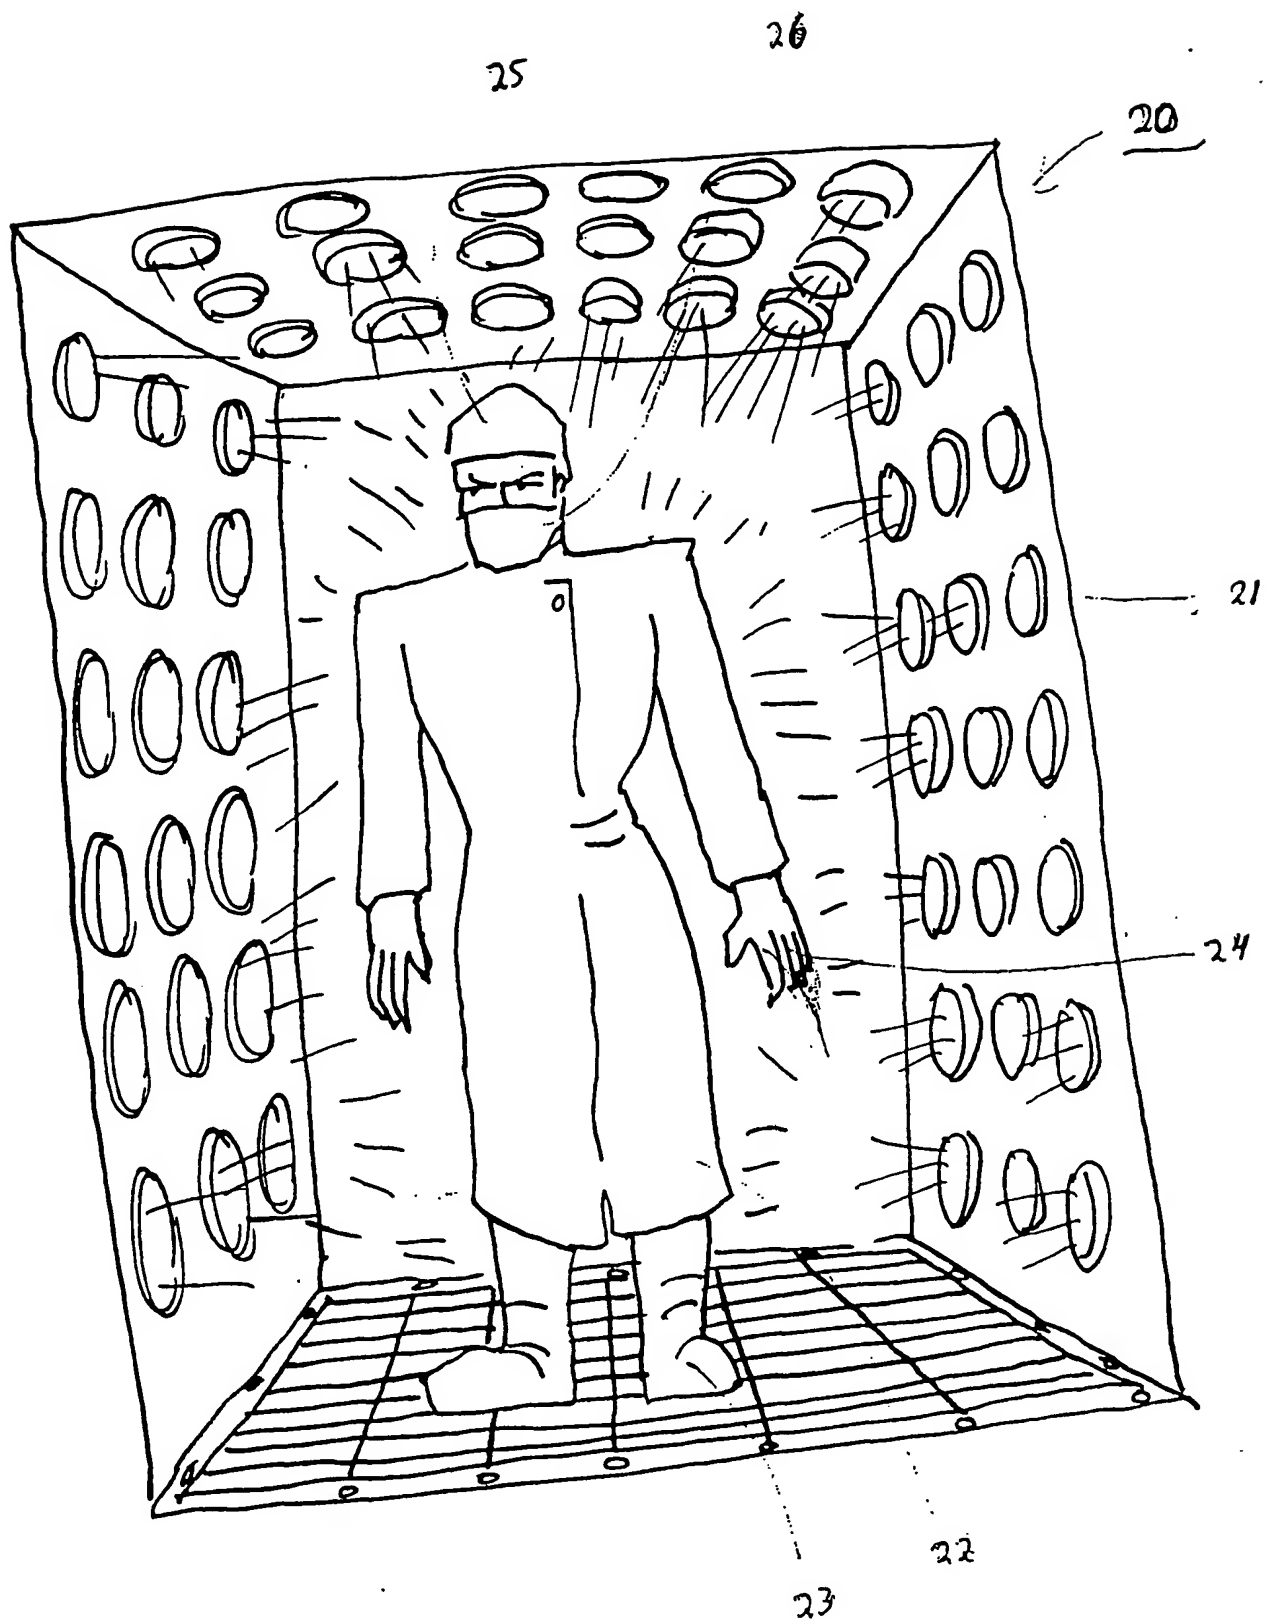


FIG. 2

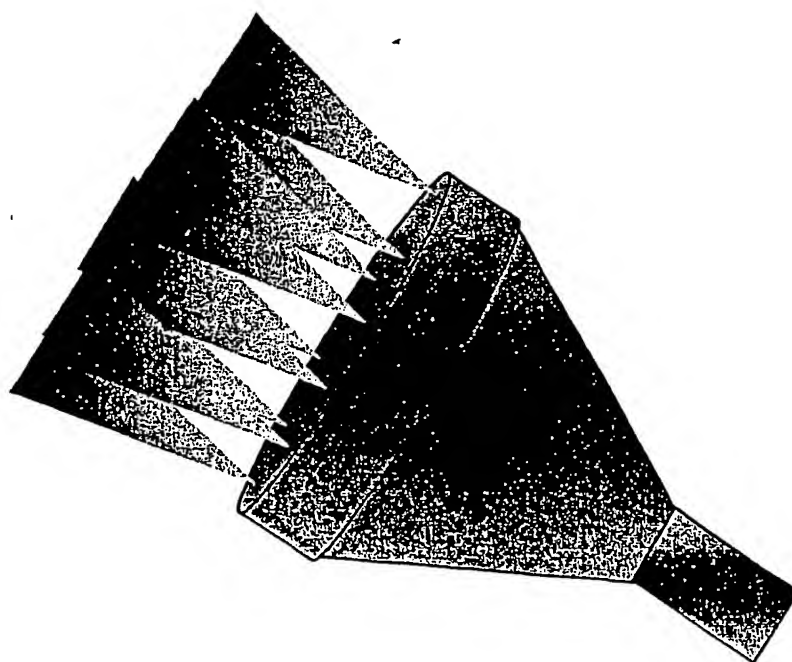


FIG. 3

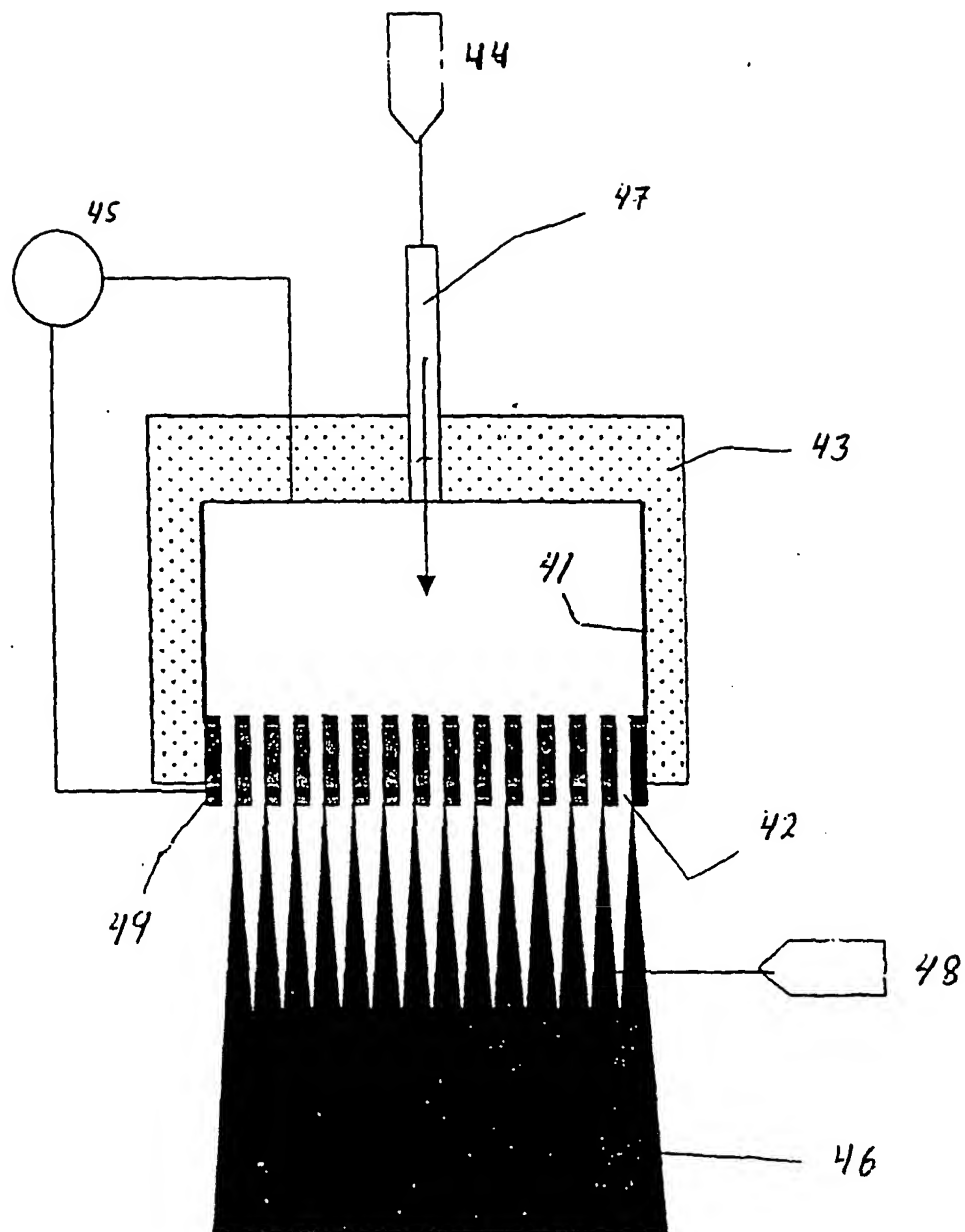


FIG. 4

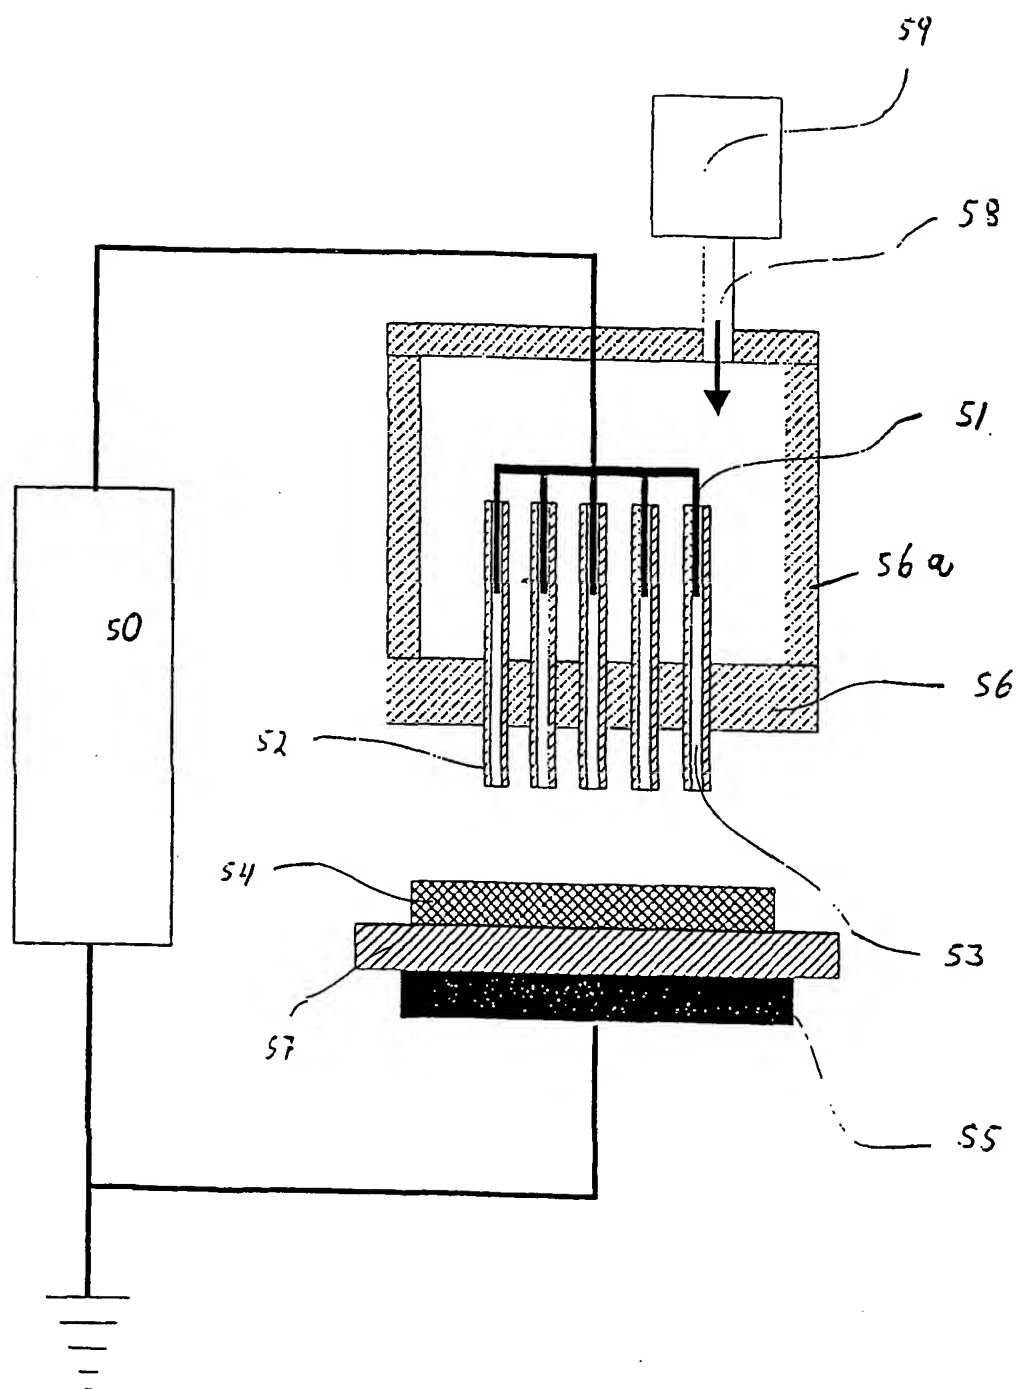


FIG. 5

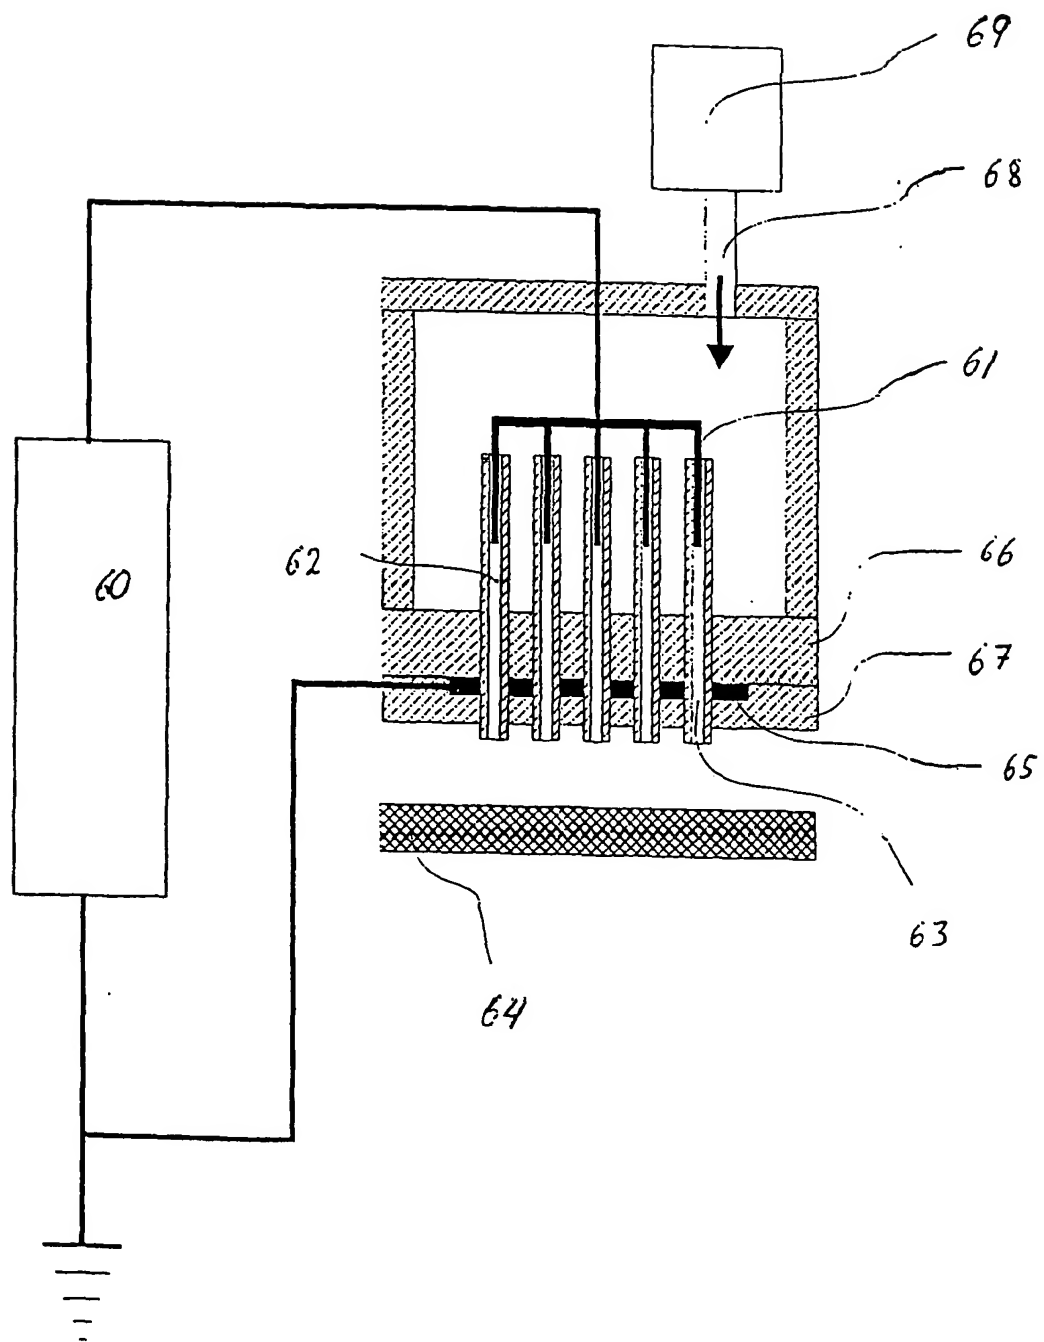


FIG. 6

INTERNATIONAL SEARCH REPORT

Inte Application No
PCT/US 02/18146

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H01J33/00 A61L2/14 H01J37/32

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01J A61L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EP0-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 00 79843 A (SKION CORP) 28 December 2000 (2000-12-28) page 5, line 21 -page 11, line 28; figures 1-3C,6-8	1-14
A	US 5 872 426 A (BECKER KURT H ET AL) 16 February 1999 (1999-02-16) abstract	1,6,11, 13

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

10 October 2002

Date of mailing of the international search report

17/10/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Centmayer, F

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	KOIDE M ET AL: "A novel low temperature plasma generator with alumina coated electrode for open air material processing" THIN SOLID FILMS, ELSEVIER-SEQUOIA S.A. LAUSANNE, CH, vol. 316, no. 1-2, 21 March 1998 (1998-03-21), pages 65-67, XP004146214 ISSN: 0040-6090 abstract figure 1	1,6,11, 13
A	US 5 423 936 A (TOMITA KAZUSHI ET AL) 13 June 1995 (1995-06-13)	
A	GB 2 347 686 A (TRIKON HOLDINGS LTD) 13 September 2000 (2000-09-13)	
A	PATENT ABSTRACTS OF JAPAN vol. 017, no. 055 (C-1023), 3 February 1993 (1993-02-03) & JP 04 268073 A (CHUGAI RO CO LTD), 24 September 1992 (1992-09-24) abstract	

INTERNATIONAL SEARCH REPORT

Information on patent family members

Inte I Application No

PCT/US 02/18146

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0079843	A	28-12-2000	US 2002092616 A1	18-07-2002
			CN 1362003 T	31-07-2002
			EP 1190604 A1	27-03-2002
			JP 2001000855 A	09-01-2001
			WO 0079843 A1	28-12-2000
US 5872426	A	16-02-1999	AU 720025 B2	18-05-2000
			AU 6468898 A	12-10-1998
			EP 1012863 A1	28-06-2000
			JP 2001527689 T	25-12-2001
			WO 9842002 A1	24-09-1998
			US 6147452 A	14-11-2000
			US 6005349 A	21-12-1999
US 5423936	A	13-06-1995	JP 2851229 B2	27-01-1999
			JP 7007001 A	10-01-1995
			KR 276093 B1	15-12-2000
			US 5593540 A	14-01-1997
GB 2347686	A	13-09-2000	JP 2000306900 A	02-11-2000
JP 04268073	A	24-09-1992	JP 7072341 B	02-08-1995

